


DS-2CC5102P(N) Dome Camera

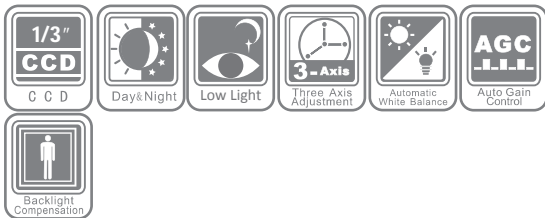

Key Features

- High performance Sony CCD
- Low illumination
- Day / night auto switch
- 3-axis adjustment
- Compact design

Specifications

DS-2CC5102P(N)	
Camera	
Image sensor	1/3" Sony Super HAD CCD II
Signal system	PAL / NTSC
Effective pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)
Min. illumination	0.1 lux@F1.2, AGC on 0.28 lux@F2.0, AGC on
Shutter time	1/50s ~ 1/100,000s
Lens	3.6mm @F2.0 (2.8mm, 6mm, 8mm, 12mm, 16mm optional) Angle of view: 78° (3.6mm)
Lens mount	M12
Angle adjustment	Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°
Day & night	Electronic
Horizontal resolution	420 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC); Test monitor out [1Vp-p composite output (75 Ω / BNC), device line]
S/N ratio	More than 50dB
General	
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	2W max.
Dimensions	Φ 97.8 x 64.4 mm (φ 3.85" x 2.54")
Weight	300g (0.66 lbs)

Available models

DS-2CC5102P, DS-2CC5102N

Dimensions

