

High performance 650 TV Lines Camera



Premium Resolution Camera

SCB-2002

The SCB-2002 is a great addition to Samsung's High Resolution Analog Camera Line. This camera utilizes the finest imaging sensor and components to provide a 650TVL picture quality. In addition, features such as True Day Night (ICR filter), Samsung Super Dynamic Range (SSDR), and Back Light Control (BLC) come together to augment Samsung's legendary low light performance. This camera is versatile, offering Digital Image Stabilization, Motion Detection, and several White Balance controls. Six different user profiles can be set for varying conditions, and the camera supports Coaxitron control over coaxial cable, as well as RS-485 control. Installation is easy thanks to dual voltage power support, and compatibility with C/CS mount types.

- High Resolution of 650TV Lines (Color), 700TV Lines (B/W)
- Min. Illumination 0.1Lux @F1.2 (Color), 0.01 Lux (B/W)
- True Day & Night (ICR), MD
- SSNR III (3D+2D), Coaxial Control, RS-485, Dual Power & 230VAC



Premium Resolution Camera

SCB-2002




Specifications

	SCB-2002N	SCB-2002P	SCB-2002PH
VIDEO			
Imaging Device	1/3" Super HAD CCD II		
Total Pixels	1,028(H) x 508(V)	1,028(H) x 596(V)	
Effective Pixels	976(H) x 494(V)	976(H) x 582(V)	
Scanning System	2:1 Interlace		
Synchronization	Internal / Line lock / Extern		
Frequency	H:15.734KHz / V:59.94Hz		H:15.625KHz / V:50Hz
Horizontal Resolution	Color: 650TV lines, B/W: 700TV lines		
Min. Illumination	Color: 0.1Lux@F1.2, 0.0002Lux (Sens-up, 512x) B/W: 0.01Lux@F1.2, 0.00002Lux (Sens-up, 512x)		
S / N Ratio	52dB (AGC off, Weight on)		
Video Output	CVBS : 1.0 Vp-p / 75Ω composite		
LENS			
Lens Type	Manual / Auto iris (Video / DC)		
Mount Type	C / CS		
OPERATIONAL			
On Screen Display	English, Japanese, Spanish, French, Portuguese, Korean	English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese	
Camera Title	Off / On (Displayed 15 characters)		
Day & Night	Auto (ICR) / External / Color / B/W		
Backlight Compensation	Off / User BLC / HLC / SSSR		
Contrast Enhancement	SSDR		
Digital Noise Reduction	SSNR111 (Off / On)		
Digital Image Stabilization	Off / On		
Motion Detection	Built-in		
Privacy Masking	Off / On (12 programmable zones with polygonal masking)		
Sens-up (Frame Integration)	2x ~ 512x		
Gain Control	Off / Low / High		
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,700K° ~ 11,000K°)		
Electronic Shutter Speed	1/60 ~ 1/120,000sec	1/50 ~ 1/120,000sec	
Digital Zoom	Off / On (1x ~ 16x)		
Reverse	Off / H-Rev / V-Rev / HV-Rev		
Profile	Basic / Day & Night / Backlight / ITS / Indoor / User		
PIP	Off / On		
Alarm	1 Out		
Communication	Coaxial control (SPC-300 compatible), RS-485		
Protocol	Coax : Pelco-C (Coaxitron) RS-485 : Samsung-T/E, Pelco-D/P, Panasonic, Bosch, Honeywell, Vicon, GE, AD		
ENVIRONMENTAL			
Operating Temperature/Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / Less than 90% RH		
ELECTRICAL			
Input Voltage / Current	Dual (24VAC ±10% & 12VDC ±10%)		230VAC ±10%
Power Consumption	Max. 4.2W		Max. 4.5W
MECHANICAL			
Color / Material	Black, Silver / Aluminum, Steel		
Dimensions (WxHxD)	66.0 x 61.0 x 102.0mm (2.6" x 2.4" x 4.02")		66.0 x 61.0 x 115.0mm (2.6" x 2.4" x 4.53")
Weight	310g (0.68lb)		540g (1.19lb)

Dimensions

Unit : mm (inch)

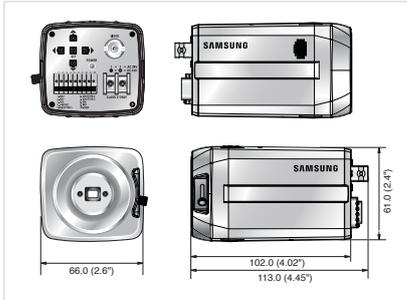

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN AMERICA Inc.
 100 Challenger Rd, Suite 700 Ridgefield Park, NJ 07660
 Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
 Fax : +1-201-373-0124
 www.samsung-security.com



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY



www.asi.ind.in