


Super High Resolution Vari-Focal IR Dome camera with OSD



Main Features

- ⇒ 1 / 3" SUPER HAD || Hi-sensitive CCD & DSP
- ⇒ 700 TVL Super High Resolution Camera
- ⇒ 0 lux @ F1.2
- ⇒ 4~9 mm Vari-Focal Auto Iris Lens
- ⇒ IR Range of 30 Mtrs with 36 LED's
- ⇒ AGC, AES, BLC, Mirror, Privacy Masking and Motion Detection
- ⇒ D-WDR, 2D-DNR
- ⇒ CE, FCC and RoHS Certified

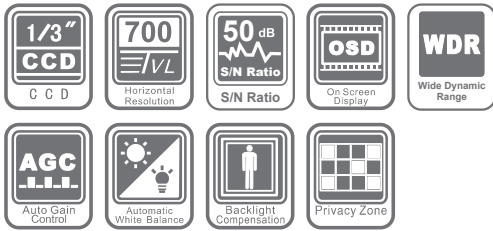

Feature	Specification
Image Sensor	1 / 3" Sony Super HAD II Hi-sensitive CCD & DSP
Pixels	PAL:960Hx582V, NTSC:967Hx494V
Resolution	700 TVL
Min. Illumination	0 lux @F1.2
S/N Ratio	more than 50dB
Electronic Shutter	1/50(1/60) - 1/100000 Sec
Lens	4~9 mm Vari-Focal Auto Iris Lens
Focus Mode	Manual
Gamma Correction	0.45
White Balance (AWB)	ON/OFF Selectable
Gain Control (AGC)	ON/OFF Selectable
Back Light Compensation	ON/OFF Selectable
IR	36 LEDs, Upto 30 Mtrs
Sync	Internal
Video Output	1.0 Vp-p/75 ohm
Special Functions	OSD, Camera Title, Mirror, Privacy Masking=8, Motion Detection=4, D-WDR, 2D-DNR
Power Supply	DC 12V ± 5%
Power Consumption	<8W
Dimensions	96mm x 140mm
Weight	640g
Operating Temperature	-20~50 °C
Certifications	CE, FCC, RoHs