

**SAMSUNG**

# Pan and Tilt your Camera

## Samsung Positioning System



Camera and lens not included



### Positioning System


# SCU-VAC/VAC1

The SCU-VAC and SCU-VAC1 are integrated positioning systems that accept various camera/lens combinations to provide high speed pan & tilt. They offer continuous 360° rotation with an extended -85° to 40° tilt range. Internal positioning encoders allow for all 255 prepositions to be accurate within 0.1° even in high wind/vibration environments. These units are rated for weatherproof protection (IP 66) and have an operating temperature range of -58° to 122°F (-50° to 50°C), making them an ideal solution for demanding outdoor applications such as traffic or critical infrastructure.

- Integrated Receiver, Pan/ Tilt, and Housing
- Position encoders for absolute positioning
- 360° Continuous Pan Rotation
- Tilt Range of +40° to -85°
- Accepts most 24VAC 3rd party Cameras
- Wiper included

## Positioning System

# SCU-VAC/VAC1




### Specifications

		SCU-VAC	SCU-VAC1
Electrical	Input Voltage	24VAC	
	Power Consumption	Max. 100W	
Operational	Pan Range	360° Endless	
	Pan Speed	Preset : 0.1°~120°/sec, Manual : 0.1°~ 36 °/sec (Turbo : 120 °/sec)	
	Tilt Range	-85° ~ 40°	
	Tilt Speed	Preset : 0.1°~ 36°/sec, Manual : 0.1°~ 36 °/sec	
	Preset Positions	255	
Environmental	Preset Accuracy	±0.1°	
	Operating Temperature	-50°C ~ +50°C (-58°F ~ +122°F)	
	Operating Humidity	0% ~ up to 100% RH	
Material	Aluminum diecasting		
Dimensions		217.3 x 587.5 x 500mm (8.56" x 23.13" x 19.69")	220 x 567.3 x 639mm (8.56" x 23.13" x 19.69")
	Weight	17Kg (37.48 lb)	
Mechanical	Ingress Protection	IP66	
	Certificate	FCC(Class A), UL/cUL Listed, CE (Class A)	
Internal	Dimensions for Camera & Lens	130 x 77 x 430mm	168 x 140 x 460mm

### Dimensions

Unit : mm (inch)

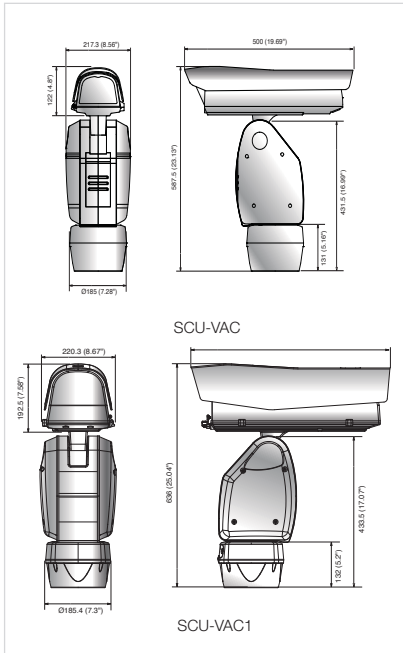

### Accessories

#### Wall Mount



SBU-500WM

#### Pedestal



SBU-220PM



**SAMSUNG TECHWIN AMERICA Inc.**  
100 Challenger Road, Suite 700, Ridgely Park, NJ 07660, UNITED STATES  
Toll Free : 1-877-213-1222 Fax : 1-201-373-0124  
www.samsungsecurityusa.com



The **Eco mark** represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



[www.asi.ind.in](http://www.asi.ind.in)